PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

400/

SKETCH SHOWING FOR THE WORK OF PROVIDING AND LAYING 300MM DIA RCC NP-3 CLASS PIPE LINE AT 8TH MAIN YAMUNA NADHI ROAD COMING UNDER MOUNTJOY SERVICE STATION.

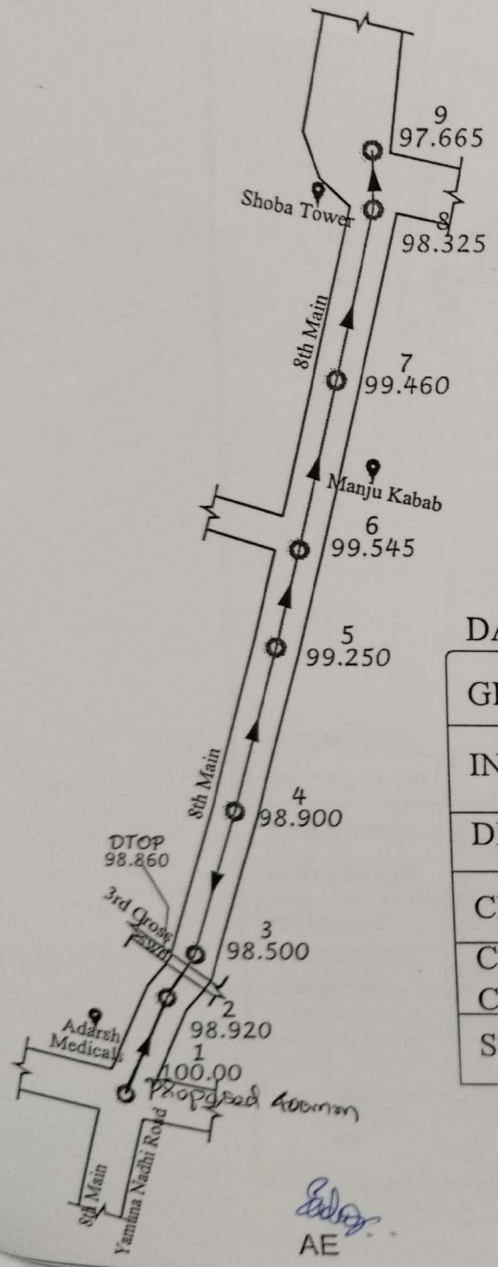

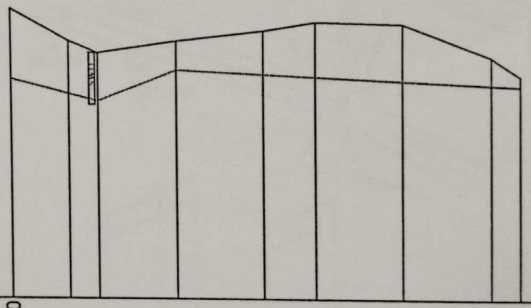

DATUM-90.000

GROUND LEVEL	100.000	98.920	98.500	98.900	99.250	99.545	99.460	98.325	97.665
INVERT LEVEL	97.600	97.120	96.800	97.900	97.750	97.645	97.510	97.325	96.665
DEPTH OF CUT	2.40	1.80	1.70	1.00	1.50	1.90	1.95	1.00	1.00
CHAINAGE	0.00	20.00	10.00	27.50	30.00	18.00	30.00	30.00	10.00
CUMULATIVE CHAINAGE	0.00	20.00	30.00	57.50	87.50	105.50	135.50	165.50	175.50
STATION	1	2	3	4	5	6	7	8	9

LONGITUDINAL SECTION

Note :All dimensions are in meter
Scale- Plan 1:1000
L/S, H- 1:2000 & V- 1:200

INDEX

ROAD	
300MM RCC LINE	
EX LINE	
FLOW DIRECTION	→
DRAIN	
MAN HOLES	o

AE

AEE

EE

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

Scanned with OKEN Scanner

Scanned with OKEN Scanner

SKETCH SHOWING FOR THE WORK OF PROVIDING AND LAYING 230MM DIA SW LINE AT 3RD CROSS, 4TH CROSS AND 5TH MAIN BSK 1ST STAGE COMING UNDER MOUNTJOY SERVICE STATION.

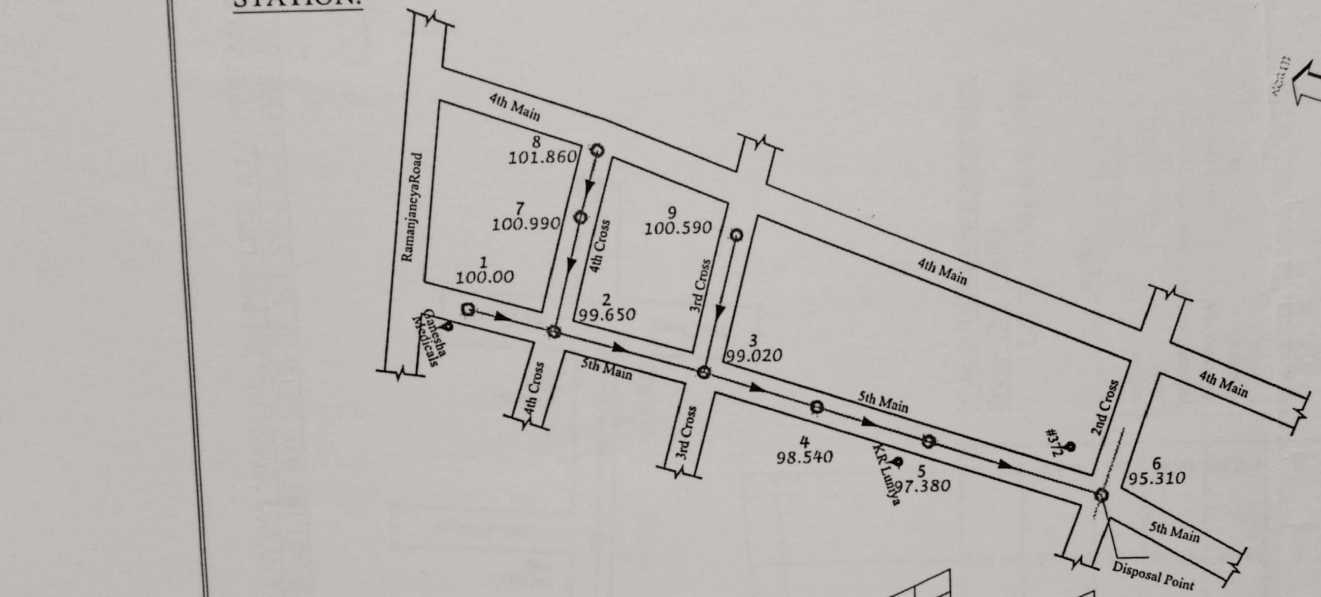

DATUM-90.000

GROUND LEVEL	100.000	99.650	99.020	98.540	97.380	95.310	99.650	100.990	101.860	99.020	100.590					
INVERT LEVEL	98.800	98.450	97.820	97.340 / 97.040	95.880	94.110 / 92.810	98.450	99.790	100.660	97.820	99.390					
DEPTH OF CUT	1.20	1.20	1.20	1.20 / 1.50	1.50	1.20 / 2.50	1.20	1.20	1.20	1.20	1.20					
CHAINAGE	0.00	22.00	39.00	30.00	30.00	46.00	0.00	30.00	18.00	0.00	36.00					
CUMULATIVE CHAINAGE	0.00	22.00	61.00	91.00	121.00	167.00	0.00	30.00	48.00	0.00	36.00					
STATION	1	2	3	4	5	6	2	7	8	3	9					

LONGITUDINAL SECTION

Note :All dimensions are in meter
Scale- Plan 1:1000
L/S, H- 1:2000 & V- 1:200

INDEX
ROAD
230MM SW LINE
EX LINE
FLOW DIRECTION
DRAIN
MAN HOLES

AE

AEE

EE

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

SKETCH SHOWING FOR THE WORK OF PROVIDING AND LAYING 230MM DIA SW PIPE LINE AT 80FT ROAD TO 5TH CROSS ALONG 17TH MAIN SBM COLONY COMING UNDER MOUNT JOY S/STN OF AEE SW-3 SUB DIVISION.

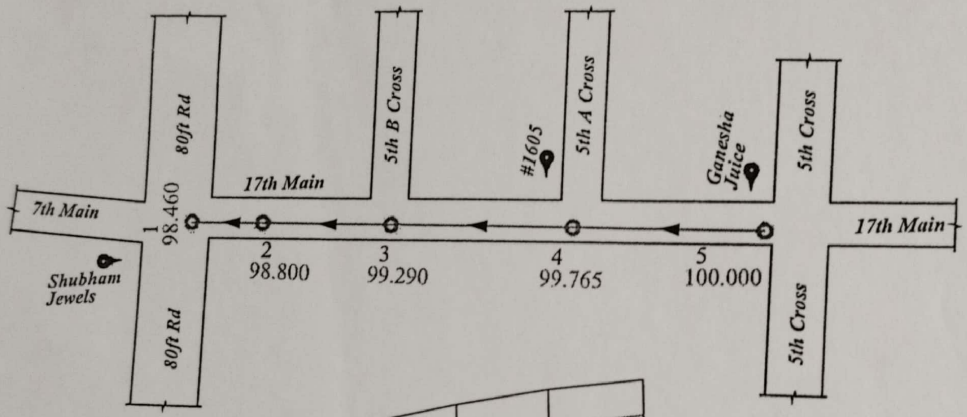



DATUM-90.000

GROUND LEVEL	98.460	98.800	99.290	99.765	100.000
INVERT LEVEL	97.460	97.600	97.790	98.165	98.500
DEPTH OF CUT	1.00	1.20	1.50	1.60	1.50
CHAINAGE	0.00	17.00	30.00	41.00	42.00
CUMULATIVE CHAINAGE	0.00	17.00	47.00	88.00	130.00
STATION	1	2	3	4	5

LONGITUDINAL SECTION

Note :All dimensions are in meter
Scale- Plan 1:1000
L/S, H- 1:1000 & V- 1:100

INDEX:

ROAD	
CC ROAD	
DRAIN	
PROPOSED 230MM DIA SW LINE	
FLOW DIRECTION	
MAN HOLES	

AE

AEE

EE

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

Scanned with OKEN Scanner